


Antenna for cellular
Antena za mobilne komunikacije

P-40 L700900 SMA




- ✓ **Covers frequency range 698 - 960 MHz (from LTE 700 to LTE 900).**
Pokriva frekvenčni pas 698 - 960 MHz (od LTE 700 do LTE 900).
- ✓ **Easy to install. Antenna have coaxial cable POPE H155 (10 meters length) and "SMA" male connector *.**
*Enostavna montaža. Antena ima koaksialni kabel POPE H155 (10 m) in "SMA" moški konektor *.*
- ✓ **Polarisation: vertical**
Polarizacija: vertikalna
- ✓ **Reliable and robust design for optimum performance and long life time.**
Zanesljiv in robusten dizajn za optimalno delovanje in dolgo življensko dobo.

* or N, FME, TNC ... connector on request
 ali N, FME, TNC ...konektor na zahtevo

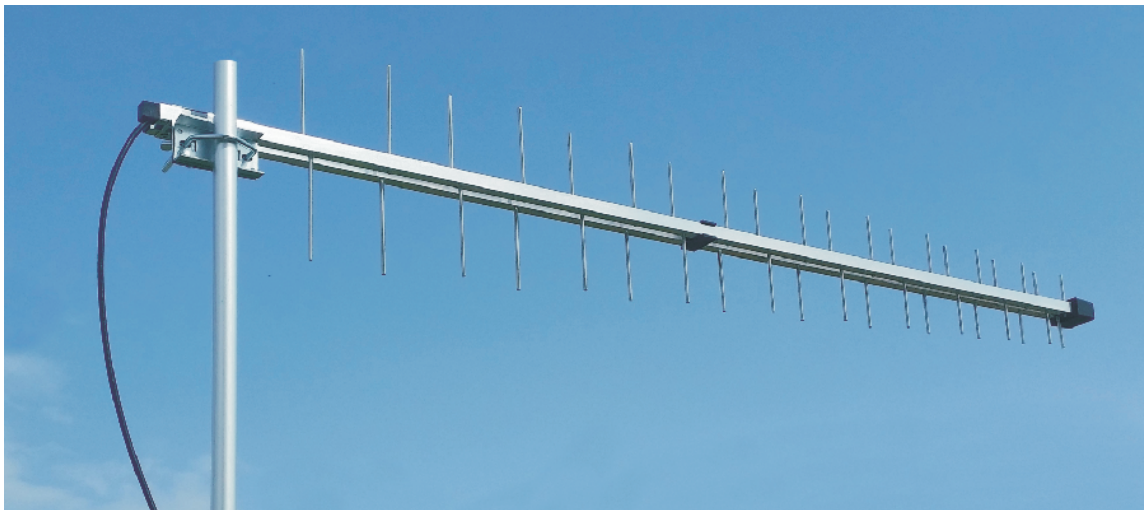
Technical data / Tehnični podatki:

Type Tip	No. of elem. Število elem.	Imped. Imped.	Gain Dobitek	F/B ratio Razmerje napr.-naz.	Max power connect. Max moč priključ.	Beam width Širina glav. lista	Max. VSWR Maks. VSWR	Antenna length Dolžina antene	Packing ** Pakiranje **	
									set kpl	cm / m3 cm / m3
P-40 L700900 SMA	40	50 Ohm	13 dB(i)	25 dB	50 Watt	H 50° V 54°	< 1,5 : 1	125 cm	10	129 x 41 x 28 / 0,148

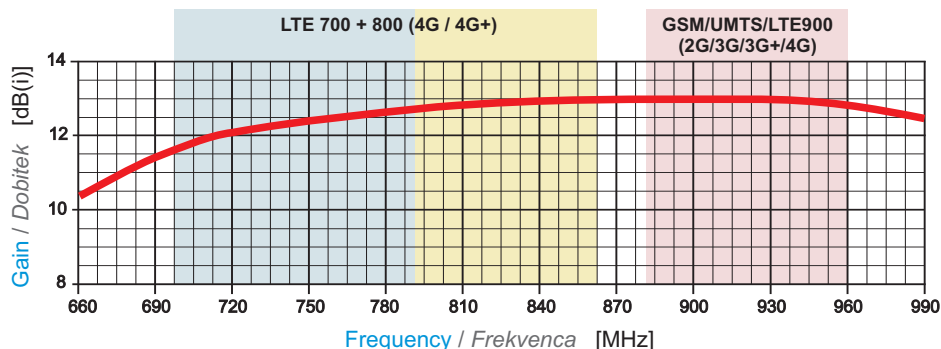

Also available in **MiMo version** (set of two antennas in 45° polarisation) **P-40 L700900 MiMo.**
 Na voljo tudi **izvedba MiMo** (komplet dveh anten z 45° polarizacijo) **P-40 L700900 MiMo.**